


## Indexing plungers

### Item description/product images

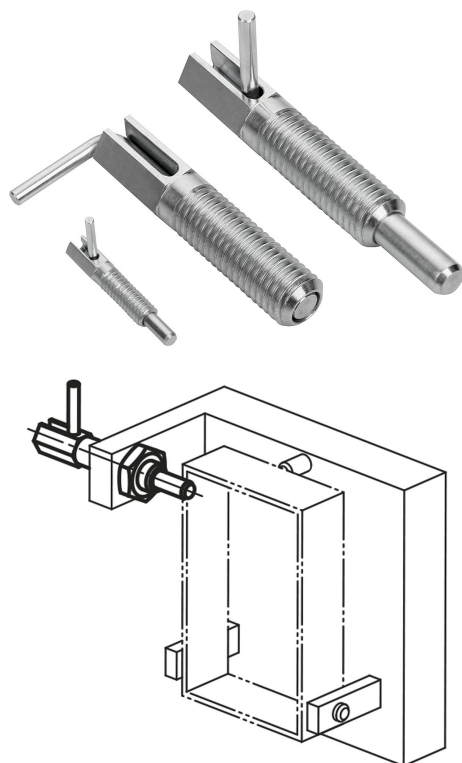

### Description

**Material:**

Steel grade 5.8.

**Version:**

Trivalent blue passivated.


**Note:**

Indexing plungers are used to prevent any change in locking position due to lateral forces. A new locking position can only be set after the pin has been manually disengaged.

**On request:**

Special versions.

### Drawings

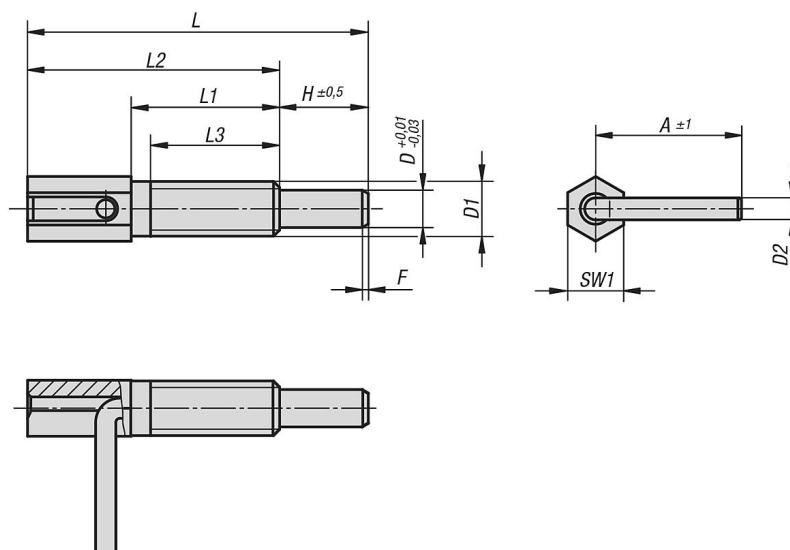

### Overview of items

#### Indexing plungers

| Order No.  | A    | D | D1  | D2  | H   | L    | L1   | L2 | L3 | SW1 | Fx30° | Spring force<br>initial pressure<br>F1 approx. N | Spring force<br>final pressure<br>F2 approx. N | Tightening<br>torque<br>max. Nm |
|------------|------|---|-----|-----|-----|------|------|----|----|-----|-------|--------------------------------------------------|------------------------------------------------|---------------------------------|
| K0340.1104 | 16   | 4 | M6  | 2,3 | 9,5 | 41,5 | 20   | 32 | 17 | 6   | 0,7   | 3                                                | 10                                             | 1,6                             |
| K0340.1905 | 19   | 5 | M8  | 3   | 12  | 54   | 27   | 42 | 24 | 8   | 0,9   | 3,5                                              | 13,5                                           | 4,5                             |
| K0340.1206 | 23,5 | 6 | M10 | 3,5 | 14  | 65   | 33,5 | 51 | 30 | 10  | 1,1   | 4                                                | 16                                             | 10                              |

## Indexing plungers

### Overview of items

| Order No.         | A  | D  | D1  | D2  | H  | L     | L1   | L2   | L3   | SW1 | Fx30° | Spring force<br>initial pressure<br>F1 approx. N | Spring force<br>final pressure<br>F2 approx. N | Tightening<br>torque<br>max. Nm |
|-------------------|----|----|-----|-----|----|-------|------|------|------|-----|-------|--------------------------------------------------|------------------------------------------------|---------------------------------|
| <b>K0340.1308</b> | 31 | 8  | M12 | 4,7 | 19 | 73    | 31,8 | 54   | 28   | 12  | 1,3   | 4                                                | 22                                             | 13                              |
| <b>K0340.1410</b> | 33 | 10 | M16 | 4,7 | 25 | 102,5 | 50,5 | 77,5 | 44,5 | 16  | 1,6   | 4                                                | 23                                             | 42                              |