

Positioning feet

Item description/product images



Description

Material:

Body high carbon steel.

Version:

Body tempered and black oxidised.

Contact faces case-hardened.

Note:

These positioning feet are used as supports for rough and machined parts. They can also be used as stops and thrust pads in fixtures and toolmaking.

Drawing reference:


Form A: Flat face hardened

Form B: Flat face hardened and ground

Form C: Spherical face hardened

Form D: Serrated face tempered

Drawings

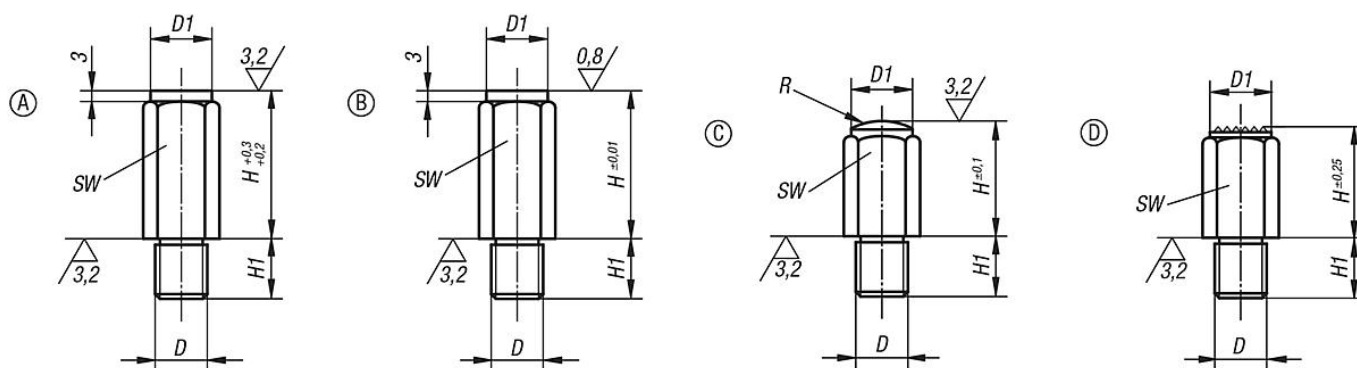

Overview of items

Positioning feet

Order No. Form A	Order No. Form B	Order No. Form C	Order No. Form D	D	D1	H	H1	R	SW
K0299.106010	K0299.206010	K0299.306010	K0299.406010	M6	10	10	11	-/-/15/-	10
K0299.106020	K0299.206020	K0299.306020	K0299.406020	M6	10	20	11	-/-/15/-	10
K0299.108010	K0299.208010	K0299.308010	-	M8	13	10	13	-/-/20/-	13
K0299.108015	K0299.208015	K0299.308015	K0299.408015	M8	13	15	13	-/-/20/-	13
K0299.108030	K0299.208030	K0299.308030	K0299.408030	M8	13	30	13	-/-/20/-	13
K0299.110010	K0299.210010	K0299.310010	-	M10	17	10	16	-/-/30/-	17
K0299.110020	K0299.210020	K0299.310020	K0299.410020	M10	17	20	16	-/-/30/-	17
K0299.110040	K0299.210040	K0299.310040	K0299.410040	M10	17	40	16	-/-/30/-	17
K0299.112010	K0299.212010	K0299.312010	-	M12	19	10	20	-/-/40/-	19
K0299.112025	K0299.212025	K0299.312025	K0299.412025	M12	19	25	20	-/-/35/-	19
K0299.112050	K0299.212050	K0299.312050	K0299.412050	M12	19	50	20	-/-/35/-	19
K0299.116015	K0299.216015	K0299.316015	-	M16	27	15	24	-/-/50/-	27
K0299.116030	K0299.216030	K0299.316030	K0299.416030	M16	27	30	24	-/-/50/-	27
K0299.116060	K0299.216060	K0299.316060	K0299.416060	M16	27	60	24	-/-/50/-	27
K0299.120040	K0299.220040	K0299.320040	K0299.420040	M20	32	40	29	-/-/60/-	32
K0299.120080	K0299.220080	K0299.320080	K0299.420080	M20	32	80	29	-/-/60/-	32