


Handwheel washers

Item description/product images

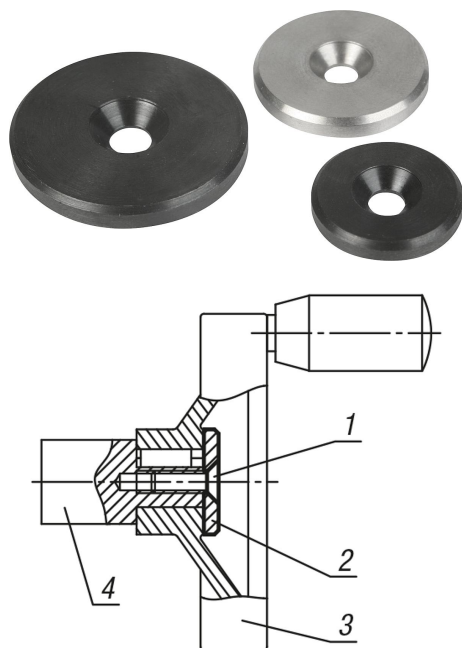

Description

Material:

Steel 1.0718.

Stainless steel 1.4305.

Version:

Steel black oxidised.

Stainless steel bright.

Note:

These washers are used together with DIN EN ISO 2009 or DIN EN ISO 10642 countersunk screws on the end of shafts with keyways to secure handwheels and crank handles.

The washers can be used with the handwheels K0671, K0160, K0161, K0162, K0163, K0164, K0165.

The steel washers are often used as caps for magnets.

Drawing reference:

D3 = for countersunk screw ISO 2009 and ISO 10642


1) countersunk screw ISO 2009 and ISO 10642

2) washer

3) handwheel

4) shaft

Drawings

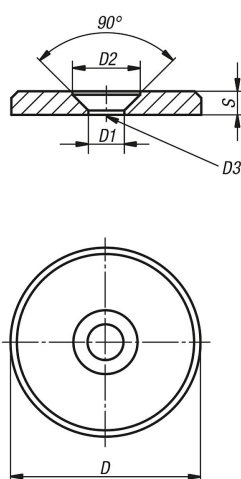

Overview of items

Handwheel washers

Order No.	Main material	D	D1	D2	D3	S
K0173.00310	steel	10	3,2	6	M3	2
K0173.00313	steel	13	3,2	6	M3	2

Handwheel washers

Overview of items

Order No.	Main material	D	D1	D2	D3	S
K0173.00416	steel	16	4,3	8,4	M4	3
K0173.00420	steel	20	4,3	8,4	M4	3
K0173.00522	steel	22	5,3	10	M5	3,5
K0173.00525	steel	25	5,3	10	M5	3,5
K0173.00528	steel	28	5,3	10	M5	3,5
K0173.00632	steel	32	6,4	12	M6	4
K0173.00636	steel	36	6,4	12	M6	4
K0173.00640	steel	40	6,4	12	M6	5
K0173.00645	steel	45	6,4	12	M6	6
K0173.00652	steel	52	6,4	12	M6	6
K0173.10310	stainless steel	10	3,2	6	M3	2
K0173.10313	stainless steel	13	3,2	6	M3	2
K0173.10416	stainless steel	16	4,3	8,4	M4	3
K0173.10420	stainless steel	20	4,3	8,4	M4	3
K0173.10522	stainless steel	22	5,3	10	M5	3,5
K0173.10525	stainless steel	25	5,3	10	M5	3,5
K0173.10528	stainless steel	28	5,3	10	M5	3,5
K0173.10632	stainless steel	32	6,4	12	M6	4
K0173.10636	stainless steel	36	6,4	12	M6	4
K0173.10640	stainless steel	40	6,4	12	M6	5
K0173.10645	stainless steel	45	6,4	12	M6	6
K0173.10652	stainless steel	52	6,4	12	M6	6