


Push-pull clamps heavy-duty version with reversible hand lever

Item description/product images

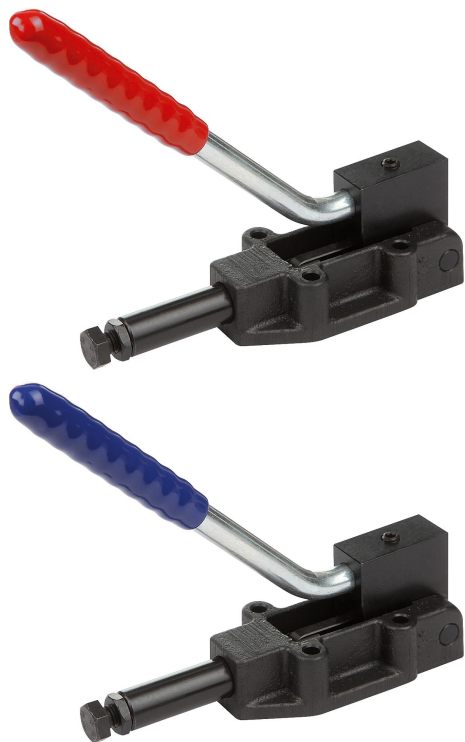

Description

Material:

Steel.

Body ductile iron (SG iron)

Version:

Phosphated.

Lever trivalent passivated.

Plastic grip oil-resistant.

Note:

The clamps lock in the open and closed handle positions. They can be used for thrust or tension clamping.

These clamps also have travel limitation for advance and retraction.

Accessory:

K0099

K0101

K0102

K0103


K0106

Drawing reference:

1) handle can be mounted right or left

Push-pull clamps heavy-duty version with reversible hand lever

Drawings

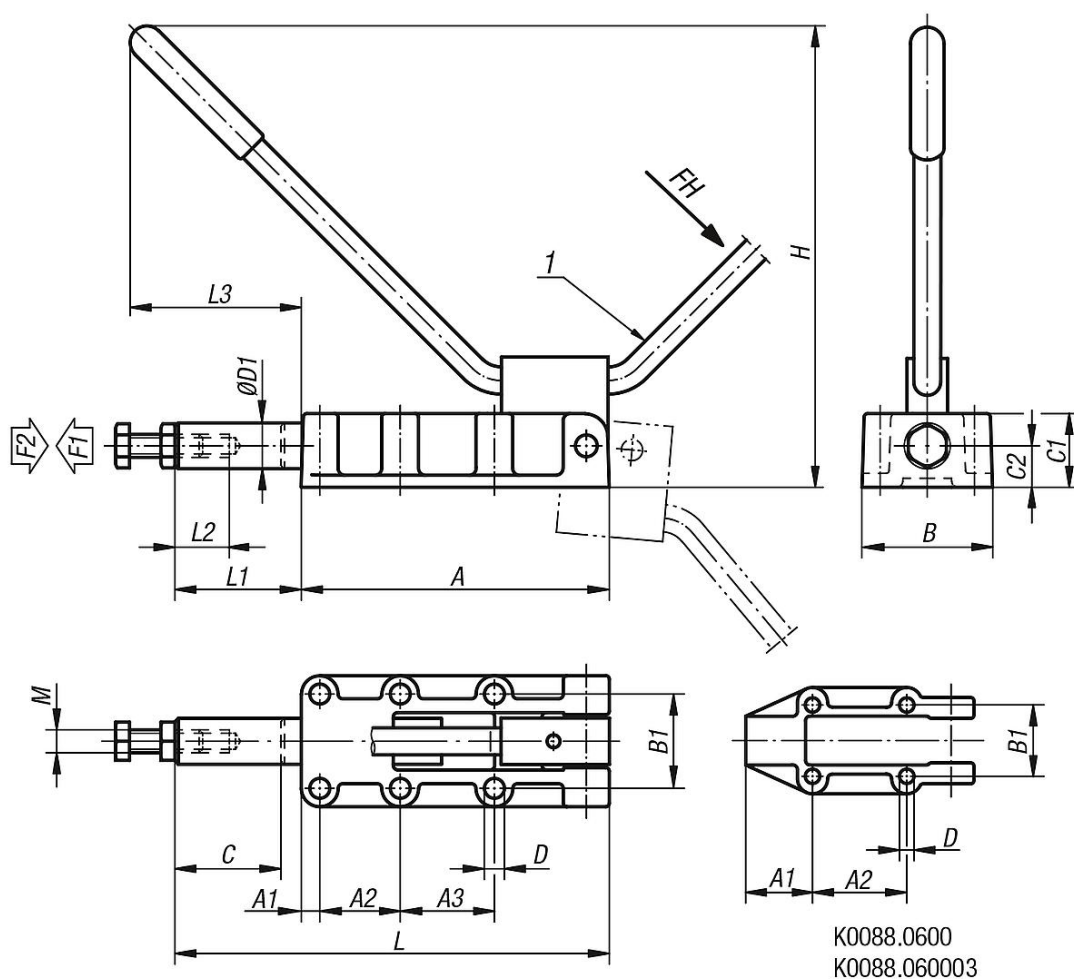

Overview of items

Push-pull clamps heavy-duty version with reversible hand lever

Order No.	Component colour	A	A1	A2	A3	B	B1	C1	C2	D	D1	H	L	L1	L2	L3	M	C (travel)
K0088.0600	blue	89	25	36,5	-	46	33,4	23	12	5,5	14	127	127	38	30	65	M8	32
K0088.1200	blue	133	8	35	41	61	41	32	18	8,5	20	196	188	55	40	106	M10	50
K0088.2500	blue	197	11	45	45	82	54	41	22	10,3	25	270	300	103	60	125	M12	75
K0088.5000	blue	254	10	70	70	85	57	50	28	10,3	30	360	390	136	60	155	M16	100
K0088.060003	red	89	25	36,5	-	46	33,4	23	12	5,5	14	127	127	38	30	65	M8	32
K0088.120003	red	133	8	35	41	61	41	32	18	8,5	20	196	188	55	40	106	M10	50
K0088.250003	red	197	11	45	45	82	54	41	22	10,3	25	270	300	103	60	125	M12	75
K0088.500003	red	254	10	70	70	85	57	50	28	10,3	30	360	390	136	60	155	M16	100
Order No.			Opening angle of handle		Hand force FH N		Retaining force F2 N		Clamping force F1 N									
K0088.0600			185°		140		6000		5800									
K0088.1200			185°		150		12000		9300									
K0088.2500			185°		170		25000		11000									
K0088.5000			185°		200		50000		12100									
K0088.060003			185°		140		6000		5800									
K0088.120003			185°		150		12000		9300									
K0088.250003			185°		170		25000		11000									
K0088.500003			185°		200		50000		12100									