

Spring plungers with slot and thrust pin, steel

Item description/product images



Description

Material:

Sleeve steel grade 5.8.

Thrust pin steel.


Spring steel wire grade D.

Version:

Black oxidised.

Thrust pin hardened.

Drawings

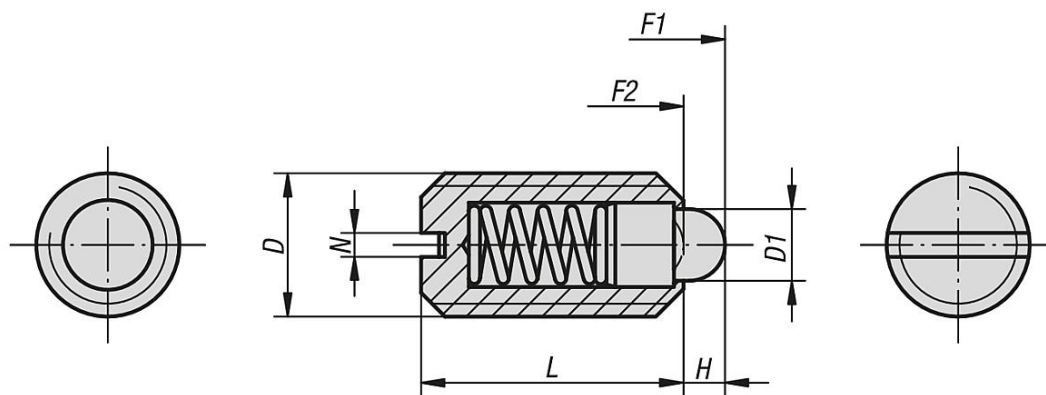

Overview of items

Spring plungers with slot and thrust pin, standard spring force

Order No.	D	D1	H	L	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.04	M4	1,8	1,5	9	0,6	6	20
K0313.05	M5	2,4	2	12	0,8	6	20
K0313.06	M6	2,7	2	14	1	7	20
K0313.08	M8	4	2	16	1,2	15	30
K0313.10	M10	4,5	2,5	19	1,6	20	35
K0313.12	M12	6	3,5	22	2	30	55
K0313.16	M16	8,5	4,5	24	2,5	45	100
K0313.20	M20	10	6,5	30	2,5	60	120

Spring plungers with slot and thrust pin, light spring force

Order No.	D	D1	H	L	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.104	M4	1,8	1,5	9	0,6	3	10
K0313.105	M5	2,4	2	12	0,8	3	10
K0313.106	M6	2,7	2	14	1	4	10
K0313.108	M8	4	2	16	1,2	7	15
K0313.110	M10	4,5	2,5	19	1,6	9	16
K0313.112	M12	6	3,5	22	2	14	26
K0313.116	M16	8,5	4,5	24	2,5	22	50
K0313.120	M20	10	6,5	30	2,5	30	60

Spring plungers with slot and thrust pin, reinforced spring force

Spring plungers with slot and thrust pin, steel

Overview of items

Order No.	D	D1	H	L	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.205	M5	2,4	2	12	0,8	9	25
K0313.206	M6	2,7	2	14	1	11	25
K0313.208	M8	4	2	16	1,2	22	43
K0313.210	M10	4,5	2,5	19	1,6	20	54
K0313.212	M12	6	3,5	22	2	36	94
K0313.216	M16	8,5	4,5	24	2,5	60	110