

Tubular handles

Item description/product images



Description

Material:

Legs black glass-bead reinforced thermoplastic.

Grip aluminium EN AW-6060 or stainless steel 1.4301.

Version:

Connecting tube aluminium, ground and natural tone anodised or with serrated plastic cover.

Connecting tube stainless steel, fine ground.

Note:


The legs have 4 webs in the hole for the grip tube. When pushing the tube in these are trimmed off and produce a precise seating.

Black electro zinc-plated fastening screws together with washers and nuts are supplied.

Assembly:

From the front.

Drawings

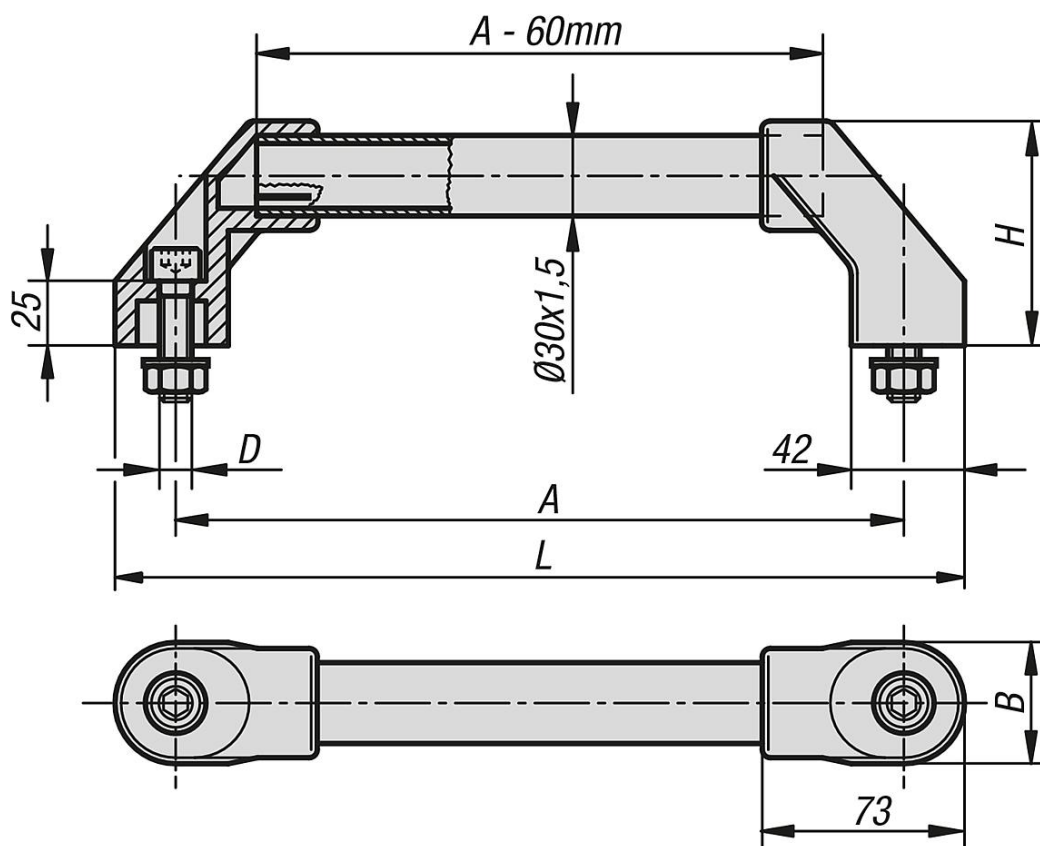

Overview of items

Tubular handles

Tubular handles

Overview of items

Order No.	Surface finish body	A	B	B1	D	H	L	Load capacity N
K0222.2501	anodized	250	44	-	M10x45	80	294	1000
K0222.3001	anodized	300	44	-	M10x45	80	344	1000
K0222.3501	anodized	350	44	-	M10x45	80	394	1000
K0222.4001	anodized	400	44	-	M10x45	80	444	1000
K0222.5001	anodized	500	44	-	M10x45	80	544	1000
K0222.6001	anodized	600	44	-	M10x45	80	644	1000
K0222.2502	Serrated plastic sleeve	250	44	-	M10x45	80	294	1000
K0222.3002	Serrated plastic sleeve	300	44	-	M10x45	80	344	1000
K0222.3502	Serrated plastic sleeve	350	44	-	M10x45	80	394	1000
K0222.4002	Serrated plastic sleeve	400	44	-	M10x45	80	444	1000
K0222.5002	Serrated plastic sleeve	500	44	-	M10x45	80	544	1000
K0222.6002	Serrated plastic sleeve	600	44	-	M10x45	80	644	1000
K0222.2503	-	250	44	-	M10x45	80	294	1000
K0222.3003	-	300	44	-	M10x45	80	344	1000
K0222.3503	-	350	44	-	M10x45	80	394	1000
K0222.4003	-	400	44	-	M10x45	80	444	1000
K0222.5003	-	500	44	-	M10x45	80	544	1000
K0222.6003	-	600	44	-	M10x45	80	644	1000