

## Ball transfer units with steel housing

### Item description/product images



### Description

**Material:**

Electro zinc-plated steel or stainless steel.

**Note:**

Ball transfer units with steel housing have a felt seal to protect against dirt.



**Drawing reference:**

- 1) load ball
- 2) bearing balls

Form B: cap and housing electro zinc-plated, balls steel


Form C: cap and housing electro zinc-plated, balls stainless steel

Form D: cap, housing and balls stainless steel

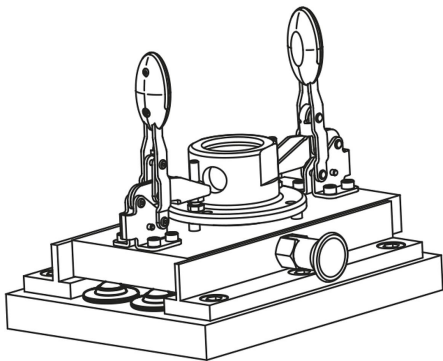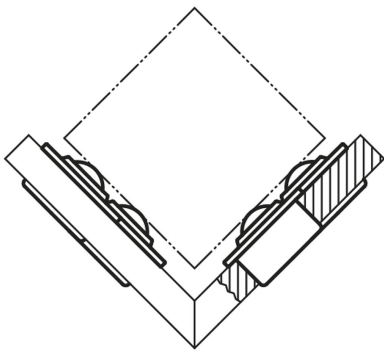

## Ball transfer units with steel housing

### Drawings

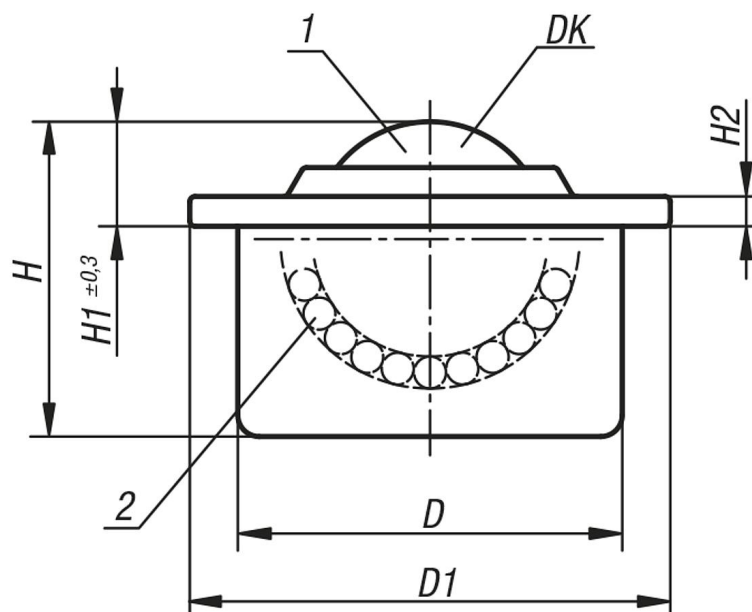

### Overview of items

#### Ball transfer units with steel housing

| Order No. | Form | DK   | D        | D1 | H    | H1   | H2  | Load rating C (N) | Suitable tolerance ring |
|-----------|------|------|----------|----|------|------|-----|-------------------|-------------------------|
| K0760.115 | B    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 600               | K0766.024               |
| K0760.122 | B    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1600              | K0766.036               |
| K0760.130 | B    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 3000              | K0766.045               |
| K0760.145 | B    | 44,5 | 62±0,095 | 75 | 53,5 | 19   | 4   | 6100              | K0766.062               |
| K0760.215 | C    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 600               | K0766.024               |
| K0760.222 | C    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1600              | K0766.036               |
| K0760.230 | C    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 3000              | K0766.045               |
| K0760.245 | C    | 44,5 | 62±0,095 | 75 | 53,5 | 19   | 4   | 6100              | K0766.062               |
| K0760.315 | D    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 380               | K0766.024               |
| K0760.322 | D    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1000              | K0766.036               |
| K0760.330 | D    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 2000              | K0766.045               |